



---

# **AP<sup>®</sup> Physics C: Electricity and Magnetism 2015 Free-Response Questions**

---

© 2015 The College Board. College Board, Advanced Placement Program, AP, AP Central, and the acorn logo are registered trademarks of the College Board.

Visit the College Board on the Web: [www.collegeboard.org](http://www.collegeboard.org).

AP Central is the official online home for the AP Program: [apcentral.collegeboard.org](http://apcentral.collegeboard.org).



## ADVANCED PLACEMENT PHYSICS C TABLE OF INFORMATION

CONSTANTS AND CONVERSION FACTORS	
Proton mass, $m_p = 1.67 \times 10^{-27}$ kg Neutron mass, $m_n = 1.67 \times 10^{-27}$ kg Electron mass, $m_e = 9.11 \times 10^{-31}$ kg Avogadro's number, $N_0 = 6.02 \times 10^{23}$ mol <sup>-1</sup> Universal gas constant, $R = 8.31$ J/(mol·K) Boltzmann's constant, $k_B = 1.38 \times 10^{-23}$ J/K	Electron charge magnitude, $e = 1.60 \times 10^{-19}$ C 1 electron volt, $1 \text{ eV} = 1.60 \times 10^{-19}$ J Speed of light, $c = 3.00 \times 10^8$ m/s Universal gravitational constant, $G = 6.67 \times 10^{-11}$ (N·m <sup>2</sup> )/kg <sup>2</sup> Acceleration due to gravity at Earth's surface, $g = 9.8$ m/s <sup>2</sup>
1 unified atomic mass unit, Planck's constant, Vacuum permittivity, Coulomb's law constant, $k = 1/(4\pi\epsilon_0) = 9.0 \times 10^9$ (N·m <sup>2</sup> )/C <sup>2</sup> Vacuum permeability, Magnetic constant, $k' = \mu_0/(4\pi) = 1 \times 10^{-7}$ (T·m)/A 1 atmosphere pressure,	$1 \text{ u} = 1.66 \times 10^{-27}$ kg = 931 MeV/c <sup>2</sup> $h = 6.63 \times 10^{-34}$ J·s = $4.14 \times 10^{-15}$ eV·s $hc = 1.99 \times 10^{-25}$ J·m = $1.24 \times 10^3$ eV·nm $\epsilon_0 = 8.85 \times 10^{-12}$ C <sup>2</sup> /(N·m <sup>2</sup> ) $\mu_0 = 4\pi \times 10^{-7}$ (T·m)/A $1 \text{ atm} = 1.0 \times 10^5$ N/m <sup>2</sup> = $1.0 \times 10^5$ Pa

UNIT SYMBOLS	meter, m	mole, mol	watt, W	farad, F
	kilogram, kg	hertz, Hz	coulomb, C	tesla, T
	second, s	newton, N	volt, V	degree Celsius, °C
	ampere, A	pascal, Pa	ohm, Ω	electron volt, eV
	kelvin, K	joule, J	henry, H	

PREFIXES		
Factor	Prefix	Symbol
10 <sup>9</sup>	giga	G
10 <sup>6</sup>	mega	M
10 <sup>3</sup>	kilo	k
10 <sup>-2</sup>	centi	c
10 <sup>-3</sup>	milli	m
10 <sup>-6</sup>	micro	μ
10 <sup>-9</sup>	nano	n
10 <sup>-12</sup>	pico	p

VALUES OF TRIGONOMETRIC FUNCTIONS FOR COMMON ANGLES							
$\theta$	0°	30°	37°	45°	53°	60°	90°
sin $\theta$	0	1/2	3/5	$\sqrt{2}/2$	4/5	$\sqrt{3}/2$	1
cos $\theta$	1	$\sqrt{3}/2$	4/5	$\sqrt{2}/2$	3/5	1/2	0
tan $\theta$	0	$\sqrt{3}/3$	3/4	1	4/3	$\sqrt{3}$	∞

The following assumptions are used in this exam.

- I. The frame of reference of any problem is inertial unless otherwise stated.
- II. The direction of current is the direction in which positive charges would drift.
- III. The electric potential is zero at an infinite distance from an isolated point charge.
- IV. All batteries and meters are ideal unless otherwise stated.
- V. Edge effects for the electric field of a parallel plate capacitor are negligible unless otherwise stated.

## ADVANCED PLACEMENT PHYSICS C EQUATIONS

### MECHANICS

$v_x = v_{x0} + a_x t$ $x = x_0 + v_{x0} t + \frac{1}{2} a_x t^2$ $v_x^2 = v_{x0}^2 + 2a_x(x - x_0)$ $\bar{a} = \frac{\sum \vec{F}}{m} = \frac{\vec{F}_{net}}{m}$ $\vec{F} = \frac{d\vec{p}}{dt}$ $\vec{J} = \int \vec{F} dt = \Delta\vec{p}$ $\vec{p} = m\vec{v}$ $ \vec{F}_f  \leq \mu  \vec{F}_N $ $\Delta E = W = \int \vec{F} \cdot d\vec{r}$ $K = \frac{1}{2} m v^2$ $P = \frac{dE}{dt}$ $P = \vec{F} \cdot \vec{v}$ $\Delta U_g = mg\Delta h$ $a_c = \frac{v^2}{r} = \omega^2 r$ $\vec{\tau} = \vec{r} \times \vec{F}$ $\bar{\alpha} = \frac{\sum \vec{\tau}}{I} = \frac{\vec{\tau}_{net}}{I}$ $I = \int r^2 dm = \sum mr^2$ $x_{cm} = \frac{\sum m_i x_i}{\sum m_i}$ $v = r\omega$ $\vec{L} = \vec{r} \times \vec{p} = I\vec{\omega}$ $K = \frac{1}{2} I \omega^2$ $\omega = \omega_0 + \alpha t$ $\theta = \theta_0 + \omega_0 t + \frac{1}{2} \alpha t^2$	<p><math>a</math> = acceleration  <math>E</math> = energy  <math>F</math> = force  <math>f</math> = frequency  <math>h</math> = height  <math>I</math> = rotational inertia  <math>J</math> = impulse  <math>K</math> = kinetic energy  <math>k</math> = spring constant  <math>\ell</math> = length  <math>L</math> = angular momentum  <math>m</math> = mass  <math>P</math> = power  <math>p</math> = momentum  <math>r</math> = radius or distance  <math>T</math> = period  <math>t</math> = time  <math>U</math> = potential energy  <math>v</math> = velocity or speed  <math>W</math> = work done on a system  <math>x</math> = position  <math>\mu</math> = coefficient of friction  <math>\theta</math> = angle  <math>\tau</math> = torque  <math>\omega</math> = angular speed  <math>\alpha</math> = angular acceleration  <math>\phi</math> = phase angle</p> $\vec{F}_s = -k\Delta\vec{x}$ $U_s = \frac{1}{2} k (\Delta x)^2$ $x = x_{max} \cos(\omega t + \phi)$ $T = \frac{2\pi}{\omega} = \frac{1}{f}$ $T_s = 2\pi \sqrt{\frac{m}{k}}$ $T_p = 2\pi \sqrt{\frac{\ell}{g}}$ $ \vec{F}_G  = \frac{Gm_1 m_2}{r^2}$ $U_G = -\frac{Gm_1 m_2}{r}$
---	--

### ELECTRICITY AND MAGNETISM

$ \vec{F}_E  = \frac{1}{4\pi\epsilon_0} \left  \frac{q_1 q_2}{r^2} \right $ $\vec{E} = \frac{\vec{F}_E}{q}$ $\oint \vec{E} \cdot d\vec{A} = \frac{Q}{\epsilon_0}$ $E_x = -\frac{dV}{dx}$ $\Delta V = -\int \vec{E} \cdot d\vec{r}$ $V = \frac{1}{4\pi\epsilon_0} \sum_i \frac{q_i}{r_i}$ $U_E = qV = \frac{1}{4\pi\epsilon_0} \frac{q_1 q_2}{r}$ $\Delta V = \frac{Q}{C}$ $C = \frac{\kappa \epsilon_0 A}{d}$ $C_p = \sum_i C_i$ $\frac{1}{C_s} = \sum_i \frac{1}{C_i}$ $I = \frac{dQ}{dt}$ $U_C = \frac{1}{2} Q \Delta V = \frac{1}{2} C (\Delta V)^2$ $R = \frac{\rho \ell}{A}$ $\vec{E} = \rho \vec{J}$ $I = Nev_d A$ $I = \frac{\Delta V}{R}$ $R_s = \sum_i R_i$ $\frac{1}{R_p} = \sum_i \frac{1}{R_i}$ $P = I \Delta V$	<p><math>A</math> = area  <math>B</math> = magnetic field  <math>C</math> = capacitance  <math>d</math> = distance  <math>E</math> = electric field  <math>\mathcal{E}</math> = emf  <math>F</math> = force  <math>I</math> = current  <math>J</math> = current density  <math>L</math> = inductance  <math>\ell</math> = length  <math>n</math> = number of loops of wire per unit length  <math>N</math> = number of charge carriers per unit volume  <math>P</math> = power  <math>Q</math> = charge  <math>q</math> = point charge  <math>R</math> = resistance  <math>r</math> = radius or distance  <math>t</math> = time  <math>U</math> = potential or stored energy  <math>V</math> = electric potential  <math>v</math> = velocity or speed  <math>\rho</math> = resistivity  <math>\Phi</math> = flux  <math>\kappa</math> = dielectric constant</p> $\vec{F}_M = q\vec{v} \times \vec{B}$ $\oint \vec{B} \cdot d\vec{\ell} = \mu_0 I$ $d\vec{B} = \frac{\mu_0}{4\pi} \frac{I d\vec{\ell} \times \hat{r}}{r^2}$ $\vec{F} = \int I d\vec{\ell} \times \vec{B}$ $B_s = \mu_0 n I$ $\Phi_B = \int \vec{B} \cdot d\vec{A}$ $\mathcal{E} = \oint \vec{E} \cdot d\vec{\ell} = -\frac{d\Phi_B}{dt}$ $\mathcal{E} = -L \frac{dI}{dt}$ $U_L = \frac{1}{2} L I^2$
--	--

## ADVANCED PLACEMENT PHYSICS C EQUATIONS

### GEOMETRY AND TRIGONOMETRY

Rectangle

$$A = bh$$

Triangle

$$A = \frac{1}{2}bh$$

Circle

$$A = \pi r^2$$

$$C = 2\pi r$$

$$s = r\theta$$

Rectangular Solid

$$V = \ell wh$$

Cylinder

$$V = \pi r^2 \ell$$

$$S = 2\pi r \ell + 2\pi r^2$$

Sphere

$$V = \frac{4}{3}\pi r^3$$

$$S = 4\pi r^2$$

Right Triangle

$$a^2 + b^2 = c^2$$

$$\sin \theta = \frac{a}{c}$$

$$\cos \theta = \frac{b}{c}$$

$$\tan \theta = \frac{a}{b}$$

$A$  = area

$C$  = circumference

$V$  = volume

$S$  = surface area

$b$  = base

$h$  = height



$\ell$  = length

$w$  = width

$r$  = radius

$s$  = arc length

$\theta$  = angle



### CALCULUS

$$\frac{df}{dx} = \frac{df}{du} \frac{du}{dx}$$

$$\frac{d}{dx}(x^n) = nx^{n-1}$$

$$\frac{d}{dx}(e^{ax}) = ae^{ax}$$

$$\frac{d}{dx}(\ln ax) = \frac{1}{x}$$

$$\frac{d}{dx}[\sin(ax)] = a \cos(ax)$$

$$\frac{d}{dx}[\cos(ax)] = -a \sin(ax)$$

$$\int x^n dx = \frac{1}{n+1} x^{n+1}, n \neq -1$$

$$\int e^{ax} dx = \frac{1}{a} e^{ax}$$

$$\int \frac{dx}{x+a} = \ln|x+a|$$

$$\int \cos(ax) dx = \frac{1}{a} \sin(ax)$$

$$\int \sin(ax) dx = -\frac{1}{a} \cos(ax)$$

### VECTOR PRODUCTS

$$\vec{A} \cdot \vec{B} = AB \cos \theta$$

$$|\vec{A} \times \vec{B}| = AB \sin \theta$$

**2015 AP<sup>®</sup> PHYSICS C: ELECTRICITY AND MAGNETISM FREE-RESPONSE QUESTIONS**


**PHYSICS C: ELECTRICITY AND MAGNETISM**

**SECTION II**

**Time—45 minutes**

**3 Questions**

**Directions:** Answer all three questions. The suggested time is about 15 minutes for answering each of the questions, which are worth 15 points each. The parts within a question may not have equal weight. Show all your work in this booklet in the spaces provided after each part.

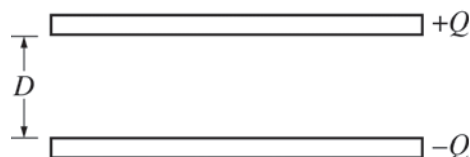


E&M.1.

A parallel-plate capacitor is constructed of two parallel metal plates, each with area  $A$  and separated by a distance  $D$ . The plates of the capacitor are each given a charge of magnitude  $Q$ , as shown in the figure above. Ignore edge effects.

(a)

- i. On the figure above, draw an arrow to indicate the direction of the electric field between the plates.
- ii. On the figure above, draw an appropriate Gaussian surface that will be used to derive an expression for the magnitude of the electric field  $E$  between the plates.
- iii. Using Gauss's law and the Gaussian surface from part (a)-ii, derive an expression for the magnitude of the electric field  $E$  between the plates. Express your answer in terms of  $A$ ,  $D$ ,  $Q$ , and physical constants, as appropriate.

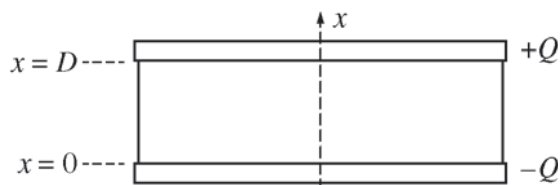

The space between the plates is now filled with a dielectric material that is engineered so that its dielectric constant varies with the distance from the bottom plate to the top plate, defined by the  $x$ -axis indicated in the diagram above. As a result, the electric field between the plates is given by  $\vec{E} = -\frac{Q}{\epsilon_0 \kappa_0 e^{-x/D} A} \hat{i}$ , where  $\kappa_0$  is a positive constant. Express all algebraic answers to the remaining parts in terms of  $A$ ,  $D$ ,  $Q$ ,  $\kappa_0$ ,  $x$ , and physical constants, as appropriate.

(b) Determine an expression for the dielectric constant  $\kappa$  as a function of  $x$ .

**2015 AP<sup>®</sup> PHYSICS C: ELECTRICITY AND MAGNETISM FREE-RESPONSE QUESTIONS**

(c)

- i. Write, but do NOT solve, an equation that could be used to determine the potential difference  $V$  between the plates of the capacitor.
- ii. Using the equation from part (c)-i, derive an expression for the potential difference  $V_D - V_0$ , where  $V_D$  is the potential of the top plate and  $V_0$  is the potential of the bottom plate.


(d) Determine the capacitance of the capacitor.

(e) The energy stored in the capacitor that has a varying dielectric is  $U_V$ . A second capacitor that has a constant dielectric of value  $\kappa_0$  is also given a charge  $Q$ . The energy stored in the second capacitor is  $U_C$ . How do the values of  $U_V$  and  $U_C$  compare?

\_\_\_\_\_  $U_V < U_C$       \_\_\_\_\_  $U_V > U_C$       \_\_\_\_\_  $U_V = U_C$

Justify your answer.

**2015 AP<sup>®</sup> PHYSICS C: ELECTRICITY AND MAGNETISM FREE-RESPONSE QUESTIONS**



E&M.2.

A student performs an experiment to determine the emf  $\mathcal{E}$  and internal resistance  $r$  of a given battery. The student connects the battery in series to a variable resistance  $R$ , with a voltmeter across the variable resistor, as shown in the figure above, and measures the voltmeter reading  $V$  as a function of the resistance  $R$ . The data are shown in the table below.


Trial #	Resistance ( $\Omega$ )	Voltage (V)	$1/R$ ( $1/\Omega$ )	$1/V$ ( $1/V$ )
1	0.50	5.6	2.00	0.179
2	1.0	7.4	1.00	0.135
3	2.0	9.4	0.50	0.106
4	3.0	10.6	0.33	0.094
5	5.0	10.9	0.20	0.092
6	10	11.4	0.10	0.088

(a)

- i. Derive an expression for the measured voltage  $V$ . Express your answer in terms of  $R$ ,  $\mathcal{E}$ ,  $r$ , and physical constants, as appropriate.
- ii. Rewrite your expression from part (a)-i to express  $1/V$  as a function of  $1/R$ .

**2015 AP<sup>®</sup> PHYSICS C: ELECTRICITY AND MAGNETISM FREE-RESPONSE QUESTIONS**

(b) On the grid below, plot data points for the graph of  $1/V$  as a function of  $1/R$ . Clearly scale and label all axes, including units as appropriate. Draw a straight line that best represents the data.

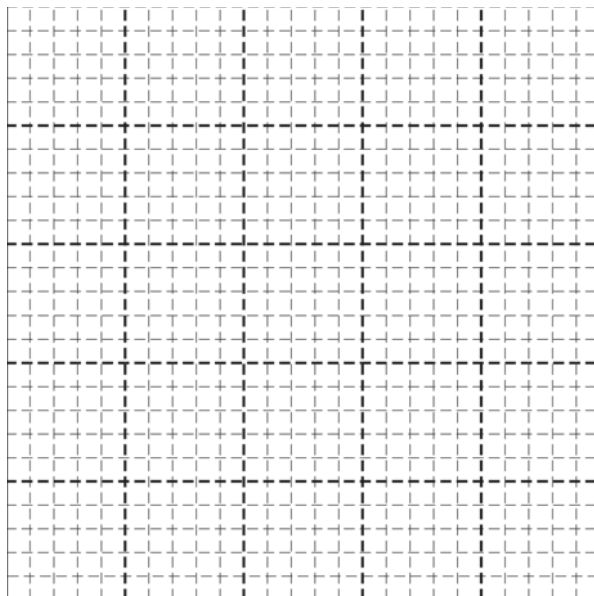

(c) Use the straight line from part (b) to obtain values for the following.

- i.  $\mathcal{E}$
- ii.  $r$

(d) Using the results of the experiment, calculate the maximum current that the battery can provide.

(e) A voltmeter is to be used to determine the emf of the battery after removing the battery from the circuit. Two voltmeters are available to take this measurement—one with low internal resistance and one with high internal resistance. Indicate which voltmeter will provide the most accurate measurement.

\_\_\_ The voltmeter with low resistance will provide the most accurate measurement.


\_\_\_ The voltmeter with high resistance will provide the most accurate measurement.

\_\_\_ The two voltmeters will provide equal accuracy.

Justify your answer.



**2015 AP<sup>®</sup> PHYSICS C: ELECTRICITY AND MAGNETISM FREE-RESPONSE QUESTIONS**

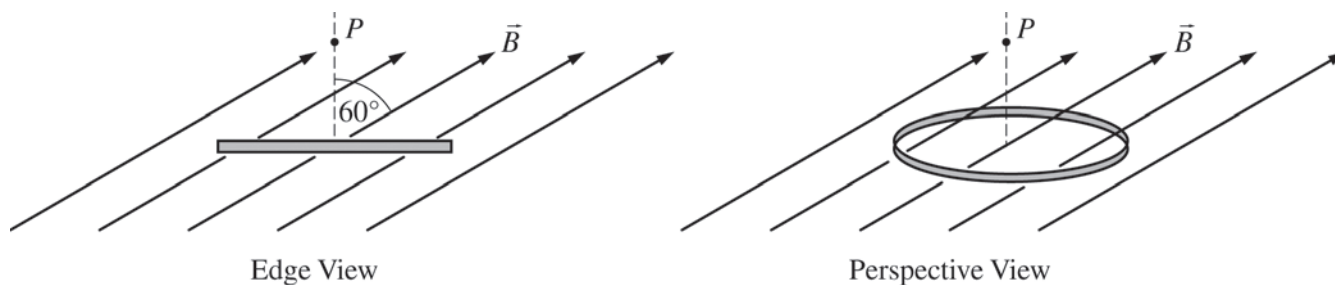

E&M. 3.

A circular wire loop with radius 0.10 m and resistance  $50 \Omega$  is held in place horizontally in a magnetic field  $\vec{B}$  directed upward at an angle of  $60^\circ$  with the vertical, as shown in the figure above. The magnetic field in the direction shown is given as a function of time  $t$  by  $B(t) = a(1 - bt)$ , where  $a = 4.0 \text{ T}$  and  $b = 0.20 \text{ s}^{-1}$ .

- (a) Derive an expression for the magnetic flux through the loop as a function of time  $t$ .
- (b) Calculate the numerical value of the induced emf in the loop.
- (c)
- i. Calculate the numerical value of the induced current in the loop.
  - ii. What is the direction of the induced current in the loop as viewed from point  $P$ ?  
 Clockwise       Counterclockwise  
 Justify your answer.
- (d) Assuming the loop stays in its current position, calculate the energy dissipated in the loop in 4.0 seconds.
- (e) Indicate whether the net magnetic force and net magnetic torque on the loop are zero or nonzero while the loop is in the magnetic field.
- Net magnetic force:     Zero       Nonzero
- Net magnetic torque:    Zero       Nonzero
- Justify both of your answers.

**STOP**  
**END OF EXAM**